





4) Scroll the cursor to [Read] and press [ENT] key to read the stored information (Call Sign, Name and AIS Module firmware ver. ) from the preset memory.

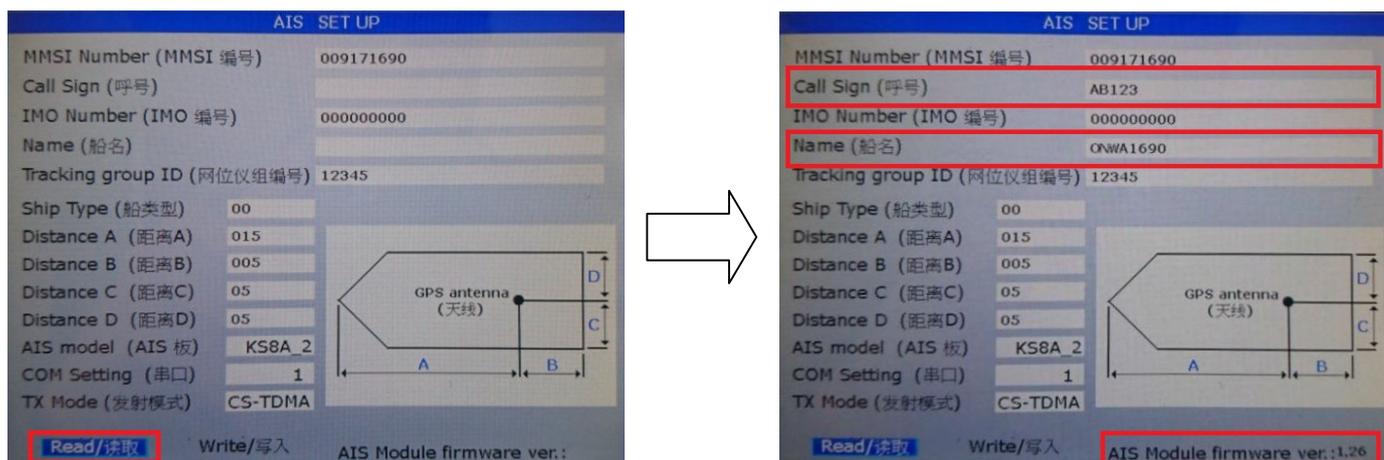

5) Scroll the cursor to [Write] after you finish editing and press [ENT] key to save the changes.

Note :

- A) Don't care the Tracking group ID if you are not necessary to use the plotter with ONWA AIS tracking buoy.
- B) Select "TX Mode = CS-TDMA" if you want to send Call Sign information by AIS

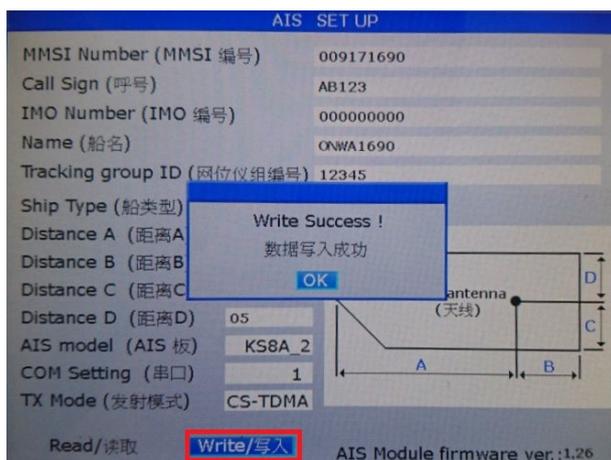

You can see " Write Success" for save the changes successfully.